




DATASHEET

19" extrusions

CONTEG

FREE-STANDING RACKS



19" EXTRUSIONS

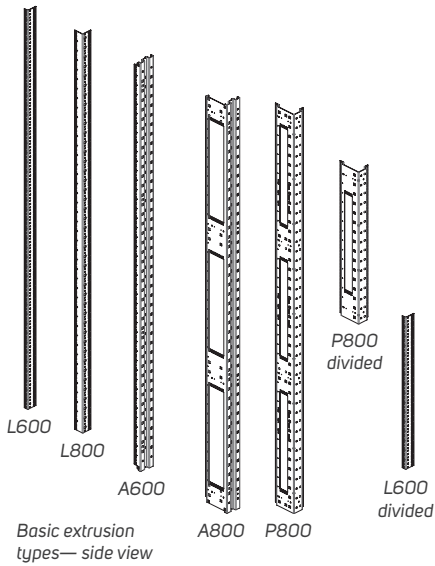

➤ A unique combination of **19" extrusions**, with many advantages.

MAIN ADVANTAGES

- Strong, stable system
- Slidable throughout entire rack depth
- Wide extrusions with additional positions

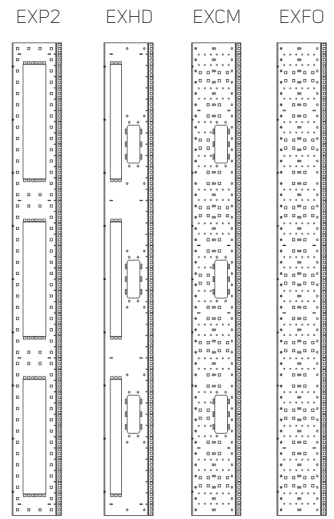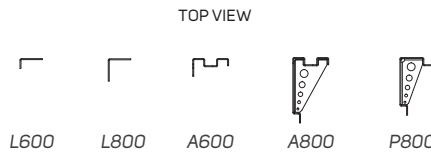

DESCRIPTION

STANDARD EXTRUSIONS	
Type	Description
L	L-profile extrusions guarantee maximum compatibility with server mounting kits, making installation even easier. L-type extrusions standard in 600 mm and 800 mm wide racks. Vertical holders used for 800 mm wide racks.
A	A-type extrusions without horizontal holders; for 800 mm provide additional 24U (3× 2U 19") of installation space — valid for racks 42U and taller, adjustable from inside.
P	P-Type extrusions for 800 mm wide RSF racks. Extrusion is a single continuous piece, each with three 3U, 19" vertical mounting positions. Additional 12U mounting positions can be used for structured cabling, active components, or filled with optional blank panels for future use.

ECCENTRIC EXTRUSIONS	
Type	Description
EXP2	Space for patch panels, PDUs and switches
EXHD	Combination space for patch panels, PDUs, switches and vertical HDWM -VMR-12/10F
EXCM *	Space for HDWM-VMR-12/10F and individual cable management
EXFO *	Universal space for individual cable management

Possible to install in racks: RDF; RSF 800 mm width only with U type extrusions supported for 42U and 45U racks.
One pair of 19" vertical extrusions included; the opposite is always an L-profile extrusion.

* Compatible with HDWM-FSS-50 and HDWM-FSS-100

Ordering information for eccentric extrusions

All CONTEG racks listed in the product catalog come with industry standard extrusions. **To order custom solutions using Eccentric Extrusions, start by ordering a rack without extrusions.** To do this, simply place an "X" in the last position (normally used to indicate rack depth) in the ordering code matrix, followed by the code for the extrusion part you've selected. The following are some examples of correct part numbers for 42U racks: ROF-LV-42/8X-EXP2, ROF-LV-42/8X-EXHD, ROF-LV-42/8X-EXCM or ROF-LV-42/8X-EXFO.

It is always necessary to order two extrusion packages: one for the front, and one for the rear. Different combinations of front and rear extrusion positions are possible. Eccentric rack extrusions can be installed by simply ordering the extrusion (mentioned above), removing the existing parts and installing the new extrusions.

Components for covering holes in extrusions	
Type	Description
DP-EHC-1000	Set of covers for 9.5 mm holes, packaged in sets of 1000 pcs each



CONTEG, spol. s r.o.

Na Vitezne plani 1719/4

140 00 Prague 4

Czech Republic

Tel.: +420 565 300 358

conteg@conteg.com

www.conteg.com

CONTEG